

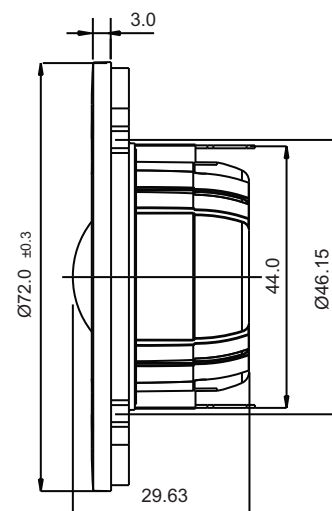


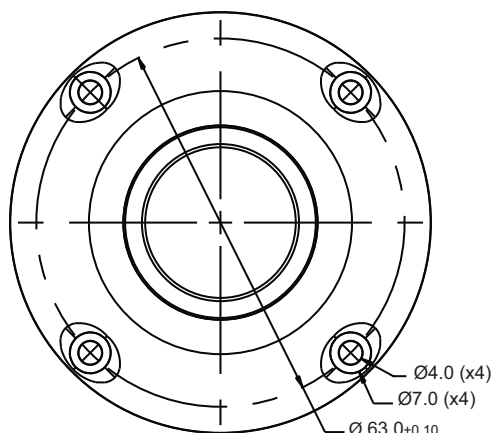

Specs :

Nominal Impedance	4 Ω	Free air resonance, F_s	960 Hz
DC resistance, R_e	3.2 Ω	Sensitivity (2.83 V / 1 m)	92.5 dB
Voice coil inductance, L_e	0.04 mH	Mechanical Q-factor, Q_{ms}	1.6
Effective piston area, S_d	6.2 cm ²	Electrical Q-factor, Q_{es}	1.77
Voice coil diameter	25.4 mm	Total Q-factor, Q_{ts}	0.84
Voice coil height	1.3 mm	Force factor, Bl	1.8 Tm
Air gap height	2.5 mm	Rated power handling*	120 W
Linear coil travel (p-p)	1.2 mm	Magnetic flux density	1.2 T
Moving mass incl. air, M_{ms}	0.3 g	Magnet weight (neo)	21 g
		Net weight	0.1 kg

* IEC 268.5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

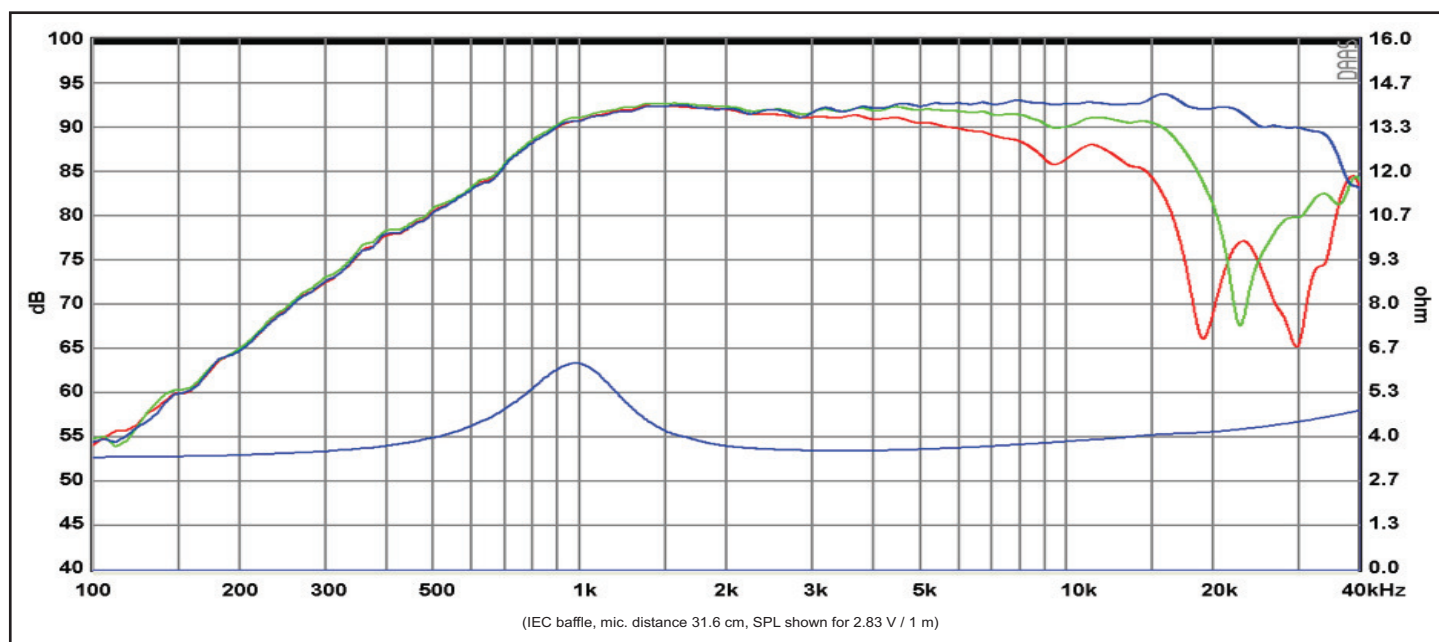

Response Curve :

— (Blue) : on axis — (Green) : 30° off-axis — (Red) : 60° off-axis